

Wet deposition

Another important process accounting for heavy metal removal from the atmosphere is wet deposition. Particle-bound heavy metals as well as soluble gaseous species are scavenged from the atmospheric air both in cloud environment and below the cloud base. Wet deposition of a substance is described by the equation:

$$\frac{\partial q}{\partial t} = -\Lambda_{wet} q, \quad (1)$$

where Λ_{wet} is the wet deposition coefficient depending on the local precipitation rate R_p .

We used the following expression for the wet deposition coefficient based on measurement data:

$$\Lambda_{wet} = A \left(\frac{R_p}{F} \right)^B. \quad (2)$$

Here A and B are empirical constants;

F is a fraction of the grid cell where precipitation occurs.

We adopt $F = 0.3$ for convective precipitation and $F = 1$ for stratiform one following the discussion in [Walton *et al.*, 1988]. The pollutant mixing ratio averaged over a grid cell after the wet deposition is given by:

$$q^{t+\Delta t} = q^t [1 - F(1 - \exp(-\Lambda_{wet}\Delta t))] \quad (3)$$

The model distinguishes in-cloud scavenging (ICS) and below-cloud scavenging (BCS).

In-cloud scavenging

In the cloud environment soluble gases dissolve very quickly in the cloud water coming into the equilibrium with the solution, while aerosol particles are taken up by cloud droplets due to nucleation or impaction scavenging. Further collection of cloud drops by falling raindrops leads to removal of the pollutants from the atmosphere. The efficiency of aerosol scavenging by cloud droplets depends upon the cloud liquid water content (LWC). Fig. 1 shows the scavenging efficiencies (i.e. the ratio of aerosol concentration in cloud water to its concentration in interstitial air) for Pb and SO_4 measured by A.Kasper *et al.* [1998] as a function of the LWC. For values of the LWC higher than 0.5 g/m^3 the efficiency commonly exceeds 0.8 and it drops down when the LWC become lower 0.1 g/m^3 . For the approximation of the dependence we used the following expression:

$$\varepsilon_w = \frac{C_w}{C_w + \varepsilon_{w0}}, \quad (4)$$

where the liquid water content C_w is in g/m^3 ;

constant ε_{w0} is equal to 0.1.

Thus for the in-cloud scavenging Eq. (3) is transformed to:

$$q^{t+\Delta t} = q^t [1 - \varepsilon_w F(1 - \exp(-\Lambda_{wet} \Delta t))], \quad (5)$$

where the scavenging efficiency ε_w for aerosol particles is defined by Eq. (4) and $\varepsilon_w = 1$ for aqueous forms.

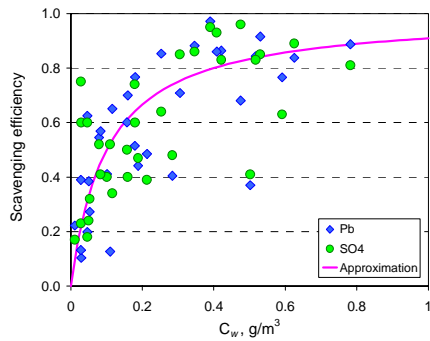


Fig. 1. Efficiency of aerosol scavenging by cloud droplets for lead and sulfate as a function of cloud LWC. Symbols show measurement data from [Kasper et al., 1998], solid line – approximation

Parameters of the wet deposition coefficient expression (2) for in-cloud scavenging estimated or measured by different authors are presented in Table 1. Taking into account values in the table and sensitivity calculations we adopted the parameters: $A_{in} = 3 \cdot 10^{-4}$, $B_{in} = 0.8$ for all heavy metal species incorporated into cloud water.

Table 2. Parameters of the wet deposition coefficient for in-cloud scavenging (A_{in} is in units of s^{-1} ; R_p is in units of mm/h)

Reference	$A_{in} (\times 10^{-4})$	B_{in}	Method
Scott, 1982	3.5	0.78	Calculation
Penner et al., 1991	1.31	1	Estimation *
Brandt et al., 2002	3.36	0.79	Estimation
Andrinache, 2004	3.97	0.81	Measurement **

* ICS plus BCS of HNO_3

** Calculations based on measured ICS plus BCS

Below-cloud scavenging

Below the cloud base aerosol particles and soluble gases are collected by falling raindrops and removed from the air. The model parameterization of below-cloud scavenging is mostly based on empirical estimates. Table 2 presents parameters of the wet deposition coefficient for BCS of particles and highly soluble gases based on measurement data. As seen different estimates of A_{below} varies roughly from $0.5 \cdot 10^{-4}$ to $2.5 \cdot 10^{-4} s^{-1}$; and B_{below} is within the range 0.62-0.79. There is no principal difference between values of the parameters for sub-micron aerosol particles and highly soluble gases. Basing on the data from the table and the sensitivity runs we adopted the values $A_{below} = 1 \cdot 10^{-4}$ and $B_{below} = 0.7$ both particle-bound heavy metals and highly soluble gaseous species (RGM).

Table 2. Parameters of the wet deposition coefficient for below-cloud scavenging
(A_{below} is in units of s^{-1} ; R_p is in units of mm/h)

Reference	A_{below} ($\times 10^{-4}$)	B_{below}	Method
Ragland and Wilkening, 1983	1.22	0.63	Estimation
Barries, 1985	1	0.67	Measurement
Jylhä, 1991	1	0.64	Measurement
Asman, 1995	0.52-0.99	0.62	Calculation *
Okita et al., 1996	1.38	0.74	Measurement
Brandt et al., 2002	0.84	0.79	Estimation
Andrinache, 2003	0.67 – 2.44	0.7	Calculation **

* - for highly soluble gases

** - theoretical calculations based on measured aerosol size spectra